

8337


**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup>:</b> <b>H02K 1/16, 3/48</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 99/29011</b> <b>(43) International Publication Date:</b> 10 June 1999 (10.06.99)
<b>(21) International Application Number:</b> PCT/SE98/02163 <b>(22) International Filing Date:</b> 27 November 1998 (27.11.98) <b>(30) Priority Data:</b> 9704381-4 27 November 1997 (27.11.97) SE <b>(71) Applicant (for all designated States except US):</b> ASEA BROWN BOVERI AB [SE/SE]; S-721 83 Västerås (SE). <b>(72) Inventor; and</b> <b>(75) Inventor/Applicant (for US only):</b> HEMMINGSSON, Jan [SE/SE]; Regementsgatan 15, S-723 45 Västerås (SE). <b>(74) Agents:</b> KARLSSON, Leif et al.; L.A. Groth & Co. KB, P.O. Box 6107, S-102 32 Stockholm (SE).		<b>(81) Designated States:</b> AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  Published With international search report.

**(54) Title:** A ROTATING ELECTRIC MACHINE WITH A MAGNETIC CORE**(57) Abstract**

The invention relates to a rotating electric machine with a magnetic core (1). The core (1) is provided with slots (2) for a winding. According to the invention, the winding comprises an electric conductor for high voltage. During at least one full winding turn, the winding is provided with means for essentially enclosing its electric fields. Further, according to the invention, the winding parts in a slot (2) are displaced in the circumferential direction relative to each other.

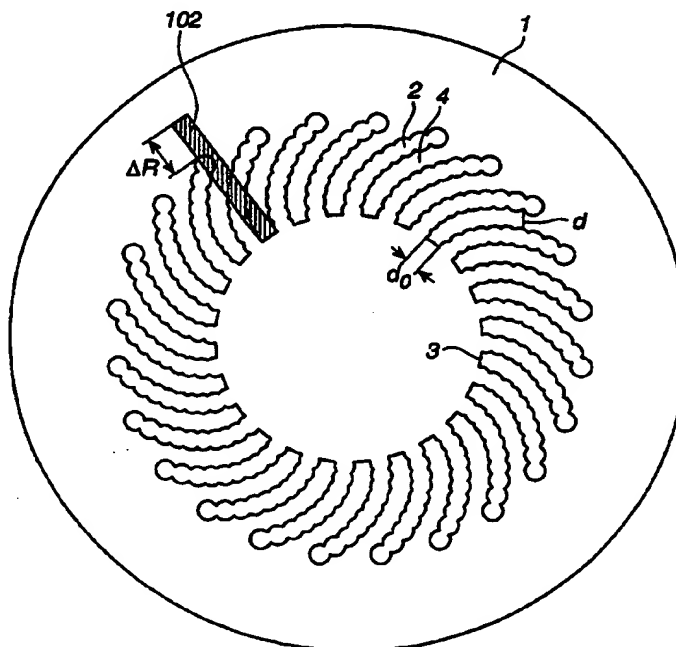

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## A ROTATING ELECTRIC MACHINE WITH A MAGNETIC CORE

The present invention relates to a rotating electric machine of the kind described in the preamble to claim 1.

5       The rotating electric machines which are referred to in this context comprises synchronous machines, which are substantially used as generators for connection to distribution and transmission networks, commonly called power networks. The synchronous machines are also used as motors as well as for phase compensation and voltage control, and, in that case, as mechanically idling  
10 machines. This technical field also comprises normal asynchronous machines, double-fed machines, AC-machines, asynchronous converter cascades, external pole machines and synchronous flux machines. These machines are intended to be used at high voltages, by which are meant here electric voltages which primarily exceed 10 kV. One typical field of operation for such a rotating machine may be  
15 36 - 800 kV, and preferably 72.5 - 800 kV.

Rotating electric machines have conventionally been designed for voltages within the interval 6 - 30 kV, whereby 30 kV has normally been considered to be an upper limit. In the generator case, this normally implies that a generator must be connected to the power network over a transformer which steps up the  
20 voltage to the level of the network, which lies within the range of about 130 - 400 kV.

Over the years, various attempts have been made to develop special synchronous machines, preferably generators, for high voltages. Examples of this are described, inter alia, in "Electrical World", October 15, 1932, pages 524-525, the  
25 article "Water-and-Oil-cooled Turbogenerator TVM-300" in J. Elektrotechnika, No. 1, 1970, pages 6-8, and patent publications US 4,424,244 and SU 955 369. However, none of these attempts has been successful, nor have they resulted in any commercially available product.

However, it has proved to be possible to use as stator winding in a rotating electric machine high-voltage insulating electric conductors with solid insulation, of a similar design as cables for transmission of electric power (e.g. so-called XLPE cables). Such a cable has, inter alia, an outer semiconducting layer, through

which the outer potential of the cable is defined. In this way, the cable encloses the electric field inside the winding. In this way, the voltage of the machine may be increased to such levels that it may be directly connected to the power network without intermediate transformers. Thus, for example, the very important advantage is achieved that the conventional transformer may be eliminated.

The insulated conductor or high-voltage cable which is used in the present invention is, as mentioned, flexible and of the kind described in more detail in PCT applications SE97/00874 (WO 97/45919) and SE97/00875 (WO 97/45847). A further description of the insulated conductor or cable is to be found in PCT-applications SE97/00901 (WO 97/45918), SE97/00902 (WO 97/45930) and SE97/00903 (WO 97/45931).

The magnetic core in the machine normally consists of a stator surrounding the rotor of the machine. In such a machine, the winding through the core extends through axial slots in the stator. These slots are generally radially directed, which implies that the distance between the slots increases with the distance from the inner lateral area of the stator. This implies that the magnetic flux density decreases outwards in the stator. At the outer part of the slots, therefore, there is a surplus of core material, which normally consists of laminated sheet iron. This makes the machine unnecessarily bulky and heavy.

This latter is no major problem for small machines, but with increasing size of the machine, the problem is accentuated.

In accordance with the present invention, the winding is in the form of a conductor for high voltage, which implies that the machine becomes relatively large with a large number of winding parts in each slot. Designing a machine for high voltage has been made possible because the conductor according to the invention is provided with means for enclosing its electric fields, as indicated in the characterizing portion of claim 1.

The problem that a considerable part of the core material is superfluous and entails an unnecessary increase of the volume and weight of the machine is therefore of especially great importance in such a machine designed for high voltage.

In the light of the above facts, the object of the present invention is to achieve a machine which can directly supply/be supplied with high voltage and hence attempt to minimize the volume and weight of the machine.

According to the invention, this has been achieved by designing a machine, of the kind described in the preamble to claim 1, so as to comprise the special features which are described in the characterizing portion of the claim.

Because of the means enclosing the electric field, and which is described in the characterizing portion, a machine is achieved which may operate in the high-voltage range and thus be connected to a high-voltage network without being connected to an intermediate transformer.

Because the winding parts exhibit a displacement in relation to one another also in the circumferential direction, which is described as an additional important characterizing feature, the radial distance between two such parts of the winding may be reduced compared with a situation in which they are only radially displaced. If both winding parts are round and have the same diameter  $2r$  and they are displaced, for example, by a distance  $r$  in relation to each other in the circumferential direction, there is room to reduce the radial distance between them by about 14%.

In the context of this application, the expression winding part means the extension of the cable between the axial ends of the stator core of one half-turn of the winding.

Another advantage is that the lateral displacement provides greater flexibility for the location of the parts of the winding in the core, which provides an increased possibility of optimizing the winding based on mechanical, magnetic, thermal and other aspects.

The winding parts in one and the same slot may thus be arranged to be more compact in relation to one another in the radial direction. This provides a possibility of reducing the extent of the slots in the radial direction such that the core may be made correspondingly smaller, with an ensuing lower weight. This results in saving of material and in advantages during manufacture and transport as well as during operation and maintenance.

The possibility of radially compacting the winding, permitted by the lateral displacement of the winding parts, of course becomes greater the more the space, which is made available by the lateral displacement, is utilized for radial compaction. According to a preferred embodiment of the invention, therefore, the pair of  
5 adjacently located winding parts is arranged such that the radially innermost portion of the outer winding part is located radially inside the outermost portion of the inner winding part.

In a preferred embodiment, the displacement increases the further out the winding parts are located. This implies that, during the compaction, the advantage  
10 is utilized that increasingly more space is available further out which is not claimed by core material and which may be utilized for increasing displacement in the circumferential direction and hence to reduce the volume to a corresponding extent.

In a preferred embodiment of the invention, the geometry of the slots is such that they also have a directional component in the transverse direction,  
15 which constitutes an appropriate adaptation of the shape of the slots to the laterally displaced winding parts.

In a preferred embodiment, this directional component is increasing in that the slot is curved in the transverse direction. This contributes to effectively utilize the outwardly increasing volume which may be utilized between the core material.

20 The optimal situation in this connection is that each slot in its entirety is curved and that all slots have the same direction of curvature, which thus constitutes an additional preferred embodiment of the invention. An ideal design, from the aspect of volume utilization, is then that all the slots are parallel.

The invention may be realized either by designing it with slots with a radially outwardly increasing width, or with slots with a constant width. In both cases,  
25 the slots may advantageously be of the "bicycle chain" type, that is, with alternating wide and narrower parts.

According to a preferred embodiment, the conductor, which comprises the means enclosing the electric field, is flexible during at least one full winding turn,  
30 which makes possible an advantageous winding process from the point of view of manufacturing engineering.

According to a preferred embodiment, the means enclosing the electric field comprises an inner semiconducting layer surrounding the conductor, an insulating layer surrounding the inner semiconducting layer, and an outer semiconducting layer surrounding the insulating layer.

5 In an especially preferred embodiment, the layers adhere to one another and have substantially the same coefficient of thermal expansion, whereby it is ensured in an appropriate way that the layers maintain their function when being subjected to the mechanical and thermal stresses occurring during operation.

The above-mentioned and other advantageous embodiments of the inventioned machine are described in the dependent claims referring to claim 1.

The invention will be described in greater detail by the following detailed description of preferred embodiments thereof with reference to the accompanying drawings.

Figure 1 is a schematic view of a stator in an electric machine according to conventional technique;

Figure 2 is a schematic radial section of a stator according to a preferred embodiment of the invention;

Figures 2a, 2b and 3 - 6 show examples of slot shapes, to which the invention is applicable;

20 Figure 7 is a principle sketch explaining the inventive concept; and

Figure 8 is a radial section through a conductor in the winding according to the invention.

Figure 1 shows a principle sketch of how the stator of a conventional electric rotating machine is normally designed. In the core 101 of laminated sheet iron, slots 102 are provided for the windings in the stator. Between each pair of slots, a portion 104 with a trapezoidal cross section is formed, in the following referred to as a stator tooth. The distance  $d_0$  between two slots 102 inside the inner lateral area 103 of the stator is determined by the amount of core material which is required for the magnetic flux density which occurs. With completely radial slots with a constant slot width, as in the figure, the width of the intermediate stator tooth will increase outwardly and provide a surplus of core material. The shaded portion of the tooth denotes the core material which thus becomes "unnecessary",

whereas the necessary core material is located between the two dashed lines. The reasoning in this context is to be regarded as a fundamental representation where, in case of different practical applications, modifications from the fundamental representation appear in dependence on different embodiments of the stator of the machine, but where the fundamental aspect of the "usefulness" of the core material is still relevant to a greater or smaller extent. The basic concept of the invention is to eliminate the "unnecessary" core material in various ways, such that the weight and volume of the core may be reduced.

Figure 2 shows a first preferred embodiment of a fundamental design of a stator according to the inventive concept, in which the core 1 is a stator 1 surrounding a rotor (not shown). In the core 1, slots 2 for the windings are provided. The slots 2 are continuously curved, all the slots 2 being curved in the same direction and being parallel. Between each pair of slots 2, a curved tooth 4 is formed with the same principal shape as the slots. Each curved tooth has a width  $d$ , that is, the distance between the walls of adjacent slots which is substantially constant and equal to its width  $d_0$  at the inner lateral area 3 of the stator.

The slots are of a so-called bicycle-chain type, in which wide portions alternate with web portions, wherein each of the wider portions accommodates its own cable part. When indicating that the tooth width  $d$  is substantially constant, the minor variations, which occur because of these alternating wide portions and web portions, are thus disregarded.

The spiral shape of the slots 2 makes their radial extent smaller than if they had been completely radial with the same number of cable parts in the slots. The shaded field 102 shows the length of the slots in a corresponding radial arrangement of the slots, and  $(R)$  designates the radial reduction of the stator which could thus be achieved. This makes the stator both smaller and lighter.

Although Figure 2 illustrates a stator according to the invention, where its principles are utilized optimally, there are many alternative possibilities of realizing them. Other considerations during manufacture, design and operation of the machine may lead to embodiments in which the inventive concept is realized in various modified forms and with various degrees of compromise between conflicting considerations.



Figures 2a and 2b illustrate some alternatives for arranging the slots. The circles represent the winding parts. In Fig. 2a, the cable diameter increases outwardly. This is also the case in Fig. 2b, where the slots are extending in a meandering pattern.

5 In other embodiments, each slot may be curved for part of its extent only, be curved with a changing radius of curvature, or be curved in different directions in meander shape. One slot may also be non-curved with a completely or partially angled relation to the radial direction. Nor does the distance between two slots need to be constant.

10 Further, Figures 3 to 6 show a few examples of basic shapes of slots, to all of which the invention may be applied. The slots are shown in their basic shape, that is, not curved as in the invention. The slot 2a in Figure 3 has a constant slot width for cable parts where these have the same diameter. The slot 2b in Figure 4 has an outwardly increasing slot width for a winding with coarser  
15 winding parts at the farther end. The slots 2c and 2d in Figures 5 and 6, respectively, show corresponding slots of the "bicycle-chain" type, that is, with alternating wide portions and web portions, the function of the latter being to fix the winding parts radially. The slots may also be designed tapering in the outward direction.

Figure 7 schematically shows two adjacently positioned winding parts  
20 displaced according to the invention, and where the intention is to show the principle of the invention.

In Figure 7, two winding parts 5, 6 are arranged in a slot 2 in a stator according to the invention. The arrow A designates the radial direction of the stator, and numeral 106 marks how the outer of the winding parts, 6, would be located if  
25 it were located completely radially outside the inner winding part 5 in a slot 102, that is, in conventional manner. For the sake of clarity, the winding parts are shown to be tangent to each other, which, of course, is not always the case. However, the representation is, in principle, relevant also when this is not the case.

The outer winding part 6 is displaced across the radial direction by a distance a compared to the conventionally placed winding part 106. This displacement has allowed space to displace the winding part 6 also in the radial direction  
30 by a distance b compared to the conventionally placed winding part 106.

With the radii  $r_1$  and  $r_2$  of the two winding parts, distance  $b = r_1 + r_2 - \sqrt{(r_1 + r_2)^2 - a^2}$  and if  $r_1 = r_2 = r$ , this is simplified to  $b = 2r - \sqrt{4r^2 - a^2}$ . If the lateral displacement  $a = r$ , the radial displacement  $b = r(2 - \sqrt{3}) = 0.27 r$ , that is, it means in this case a reduction of the radial space, required by the outer winding part, by about 14 %.

Finally, Figure 8 shows a cross section of a cable which is particularly suitable for use as a winding in the stator according to the invention. The cable 6 comprises at least one current-carrying conductor 31 of, for example, copper surrounded by a first semiconducting layer 32. Around this first semiconducting layer there is arranged an insulating layer 33, for example an XLPE insulation, and around this layer there is arranged, in turn, a second semiconducting layer 34. The electric conductor may consist of a number of parts 31. The three layers are designed so as to adhere to one another also when the cable is bent. The cable shown is flexible and this property is maintained in the cable during its service life. The illustrated cable also differs from a conventional high-voltage cable in that the outer mechanically protecting casing and the metal screen which normally surrounds it are eliminated.

---

## CLAIMS

1. A rotating electric machine comprising a magnetic core (1) with a centre axis defining an axial direction, a radial direction and a circumferential direction of the core, said core (1) exhibiting a plurality of slots (2), each slot (2) defining a longitudinal direction comprising an axial directional component and a transverse direction comprising a radial directional component wherein the directions of the slot (2) are defined by its centre plane between the walls of the slot (2), and the slot (2) has a width which is defined as the distance between its walls, an electric winding with a plurality of winding parts (5, 6), extending in the longitudinal direction, being arranged in each slot (2), at least some winding slots (5, 6) in at least some slots being located radially displaced in relation to one another, characterized in that the winding comprises an electric conductor (31) for high voltage, said conductor (31), during at least one full winding turn, being provided with means (32, 33, 34) for essentially enclosing its electric fields, and that at least one pair of adjacently located winding parts (5, 6) in a slot (2) are displaced in the circumferential direction relative to each other.

2. A rotating electric machine according to claim 1, in which, in said pair of adjacently located winding parts (5, 6), the radially innermost part of the outer winding part (6) is located radially inside the outermost part of the inner winding part (5).

3. A rotating electric machine according to claim 1 or 2, in which at least two pairs of winding parts (5, 6) in the slot are displaced in the circumferential direction in relation to each other and wherein the displacement is greater the farther outwards, in the radial direction, the winding parts (5, 6) are located.

4. A rotating electric machine according to any of claim 1 or 2, in which at least some slot (2) along at least part of its transverse direction has a directional component in the circumferential direction.

5. A rotating electric machine according to claim 4, in which at least some slot (2) is at least partially curved in the transverse direction.

6. A rotating electric machine according to claim 5, in which each slot (2) is curved along its whole transverse direction and all the slots (2) have the same radius of curvature.

7. A rotating electric machine according to any of claims 1-6, in which all the slots (2) are parallel in both the longitudinal direction and the transverse direction.

10

8. A rotating electric machine according to any of claims 1-6, in which at least some slot (2b, 2d) has an increasing width outwards along the transverse direction.

9. A rotating electric machine according to any of claims 1-7, in which at least some slot (2a, 2c) has a constant width in the transverse direction.

10. A rotating electric machine according to any of claims 1-6, in which at least some slot (2c, 2d) in the transverse direction has alternating portions with a larger and smaller width.

20

11. A rotating electric machine according to claims 10, in which the portions with a larger width have a varying width.

12. A rotating electric machine according to claims 10, in which the portions with a larger width have mutually the same width.

25

13. A rotating electric machine according to any of claims 1-12, in which the conductor, during at least one full winding turn, is flexible.

30

14. A rotating electric machine according to any of claims 1-13, in which said means comprise an inner semiconducting layer (32) surrounding the conductor,

an insulating layer (33) surrounding the semiconducting layer (32), and an outer semiconducting layer (34) surrounding the insulating layer (33).

15. A rotating electric machine according to claim 14, in which each semicon-  
s ducting layer (32, 34) constitutes essentially an equipotential surface.

16. A rotating electric machine according to claim 15, in which the layers (32,  
33, 34) adhere to one another along the whole winding, and that said semicon-  
ducting layers (32, 34) have substantially the same coefficient of thermal conduc-  
10 tivity as the intermediate insulating layer (33).

17. A rotating electric machine according to any of claims 1-16, in which said  
means (32, 33, 34) are dimensioned to allow a voltage in the conductor which is  
greater than 72 kV.

15

---

**THIS PAGE BLANK (USPTO)**

1/3

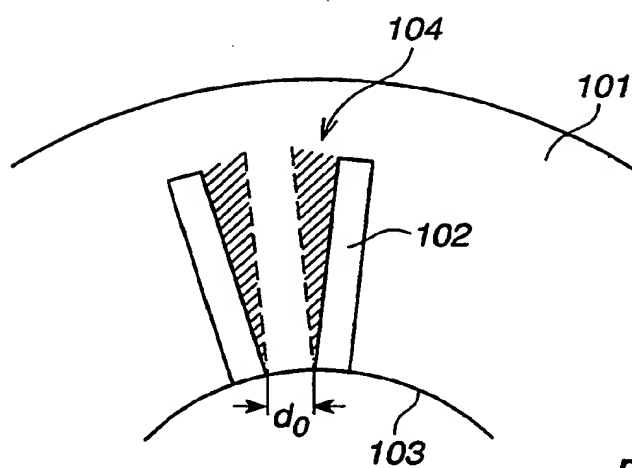


Fig. 1

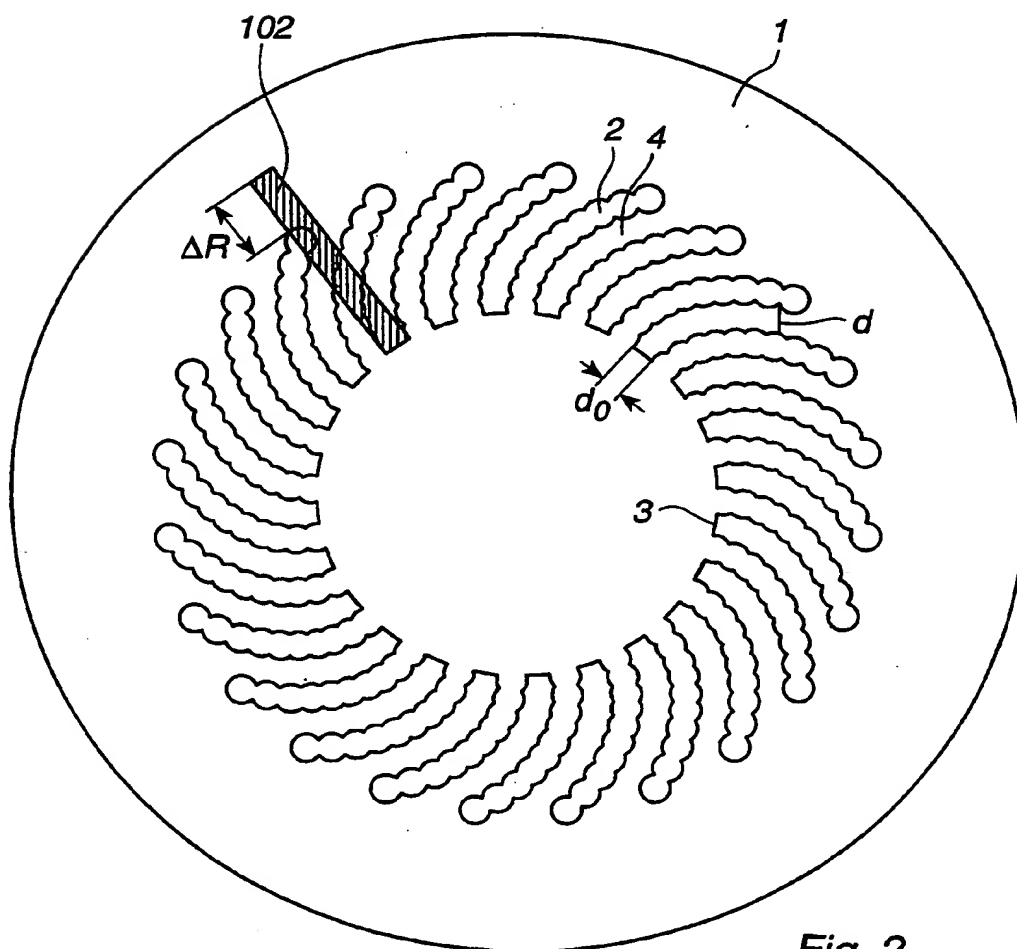


Fig. 2

**THIS PAGE BLANK (USPTO)**



2/3

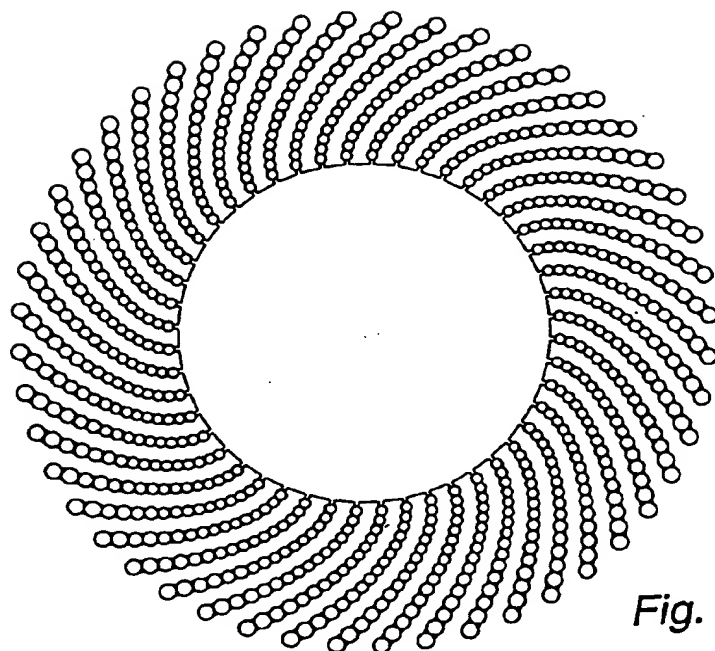


Fig. 2 a

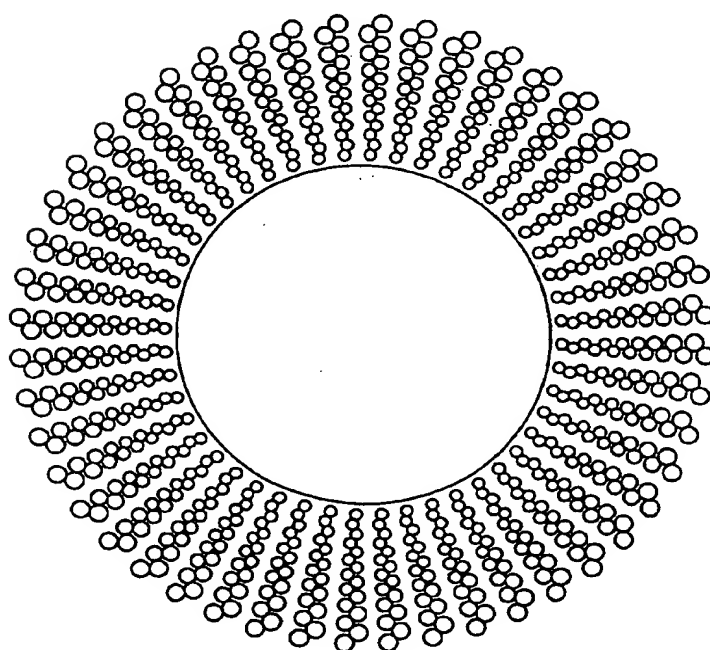


Fig. 2 b

**THIS PAGE BLANK (USPTO)**

3/3




Fig. 3




Fig. 4




Fig. 5




Fig. 6

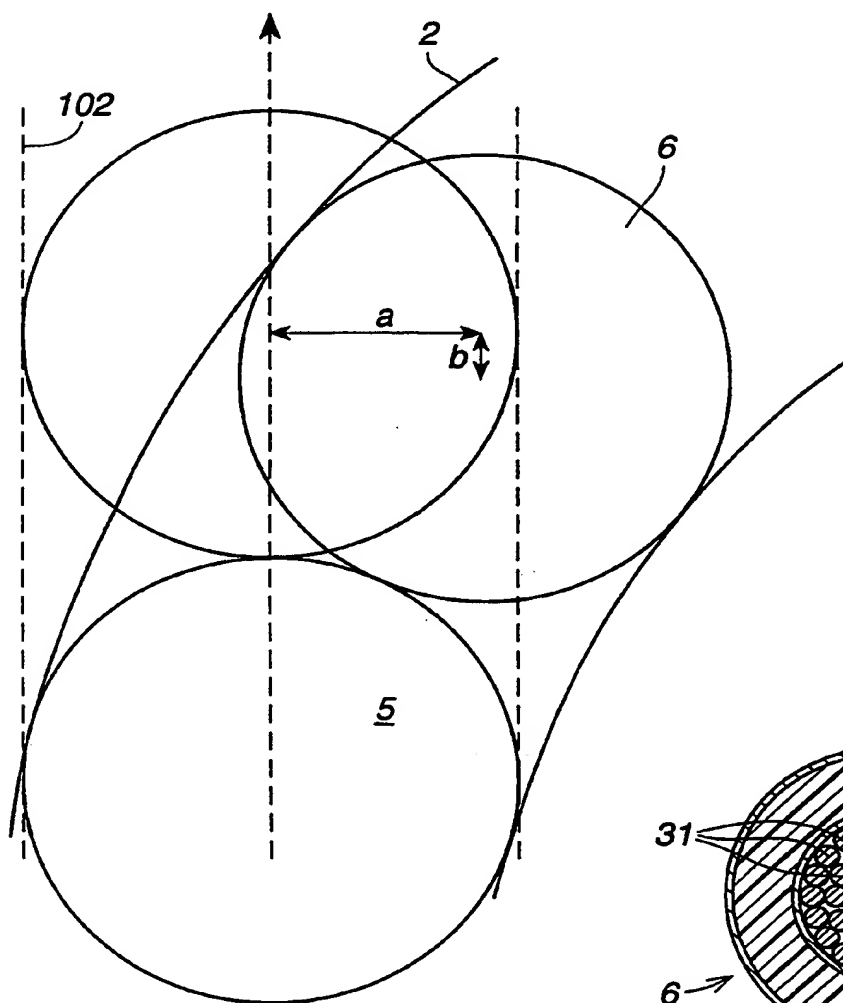


Fig. 7

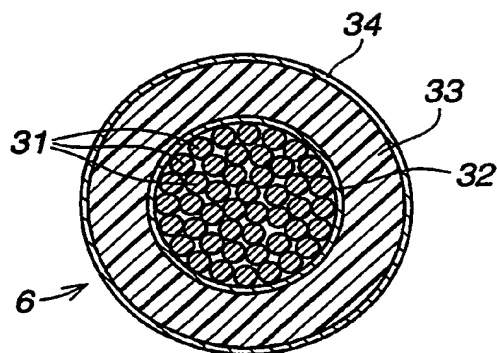


Fig. 8

**THIS PAGE BLANK (USPTO)**

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 98/02163

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H02K 1/16, H02K 3/48

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H02K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 2283133 A (GENERAL ELECTRIC COMPANY), 26 April 1995 (26.04.95), figure 18 --	1-17
A	FR 2467502 A1 (DUCELLIER & CIE), 17 April 1981 (17.04.81), figure 2 --	1-17
A	CH 534448 A5 (SIEMENS AKTIENGESELLSCHAFT), 28 February 1973 (28.02.73), figure 1 --	1-17
A	SU 955369 A (SCI SECT GIDROPROEKT RES INST), 30 August 1982 (30.08.82), figure 4 -- -----	1-17

☐ Further documents are listed in the continuation of Box C. ☒ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

1 March 1999

Date of mailing of the international search report

11 -03- 1999

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer

Gordana Ninkovic  
Telephone No. +46 8 782 25 00

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No.

PCT/SE 98/02163

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB 2283133 A	26/04/95	CA 2118067 A	21/04/95
		DE 4436898 A	27/04/95
		GB 9420099 D	00/00/00
		GB 9710022 D	00/00/00
		GB 9710024 D	00/00/00
		GB 9710026 D	00/00/00
		IT 1274580 B	17/07/97
		IT MI942135 A	20/04/95
		US 5636432 A	10/06/97
		US 5640064 A	17/06/97
		US 5668429 A	16/09/97
FR 2467502 A1	17/04/81	NONE	
CH 534448 A5	28/02/73	DE 2111086 A	14/09/72
SU 955369 A	30/08/82	NONE	